

# Galex Mini Two

Surface Mounted

Versatile 2-light

NEW



2\*7.6W Power  
Up to 2\*424lm Lumen  
2700K 3000K 4000K CCT



Product Information	<b>Power</b>	2* 7.6W		
	<b>CRI</b>	>90Ra		
	<b>CCT</b>	2700K	3000K	4000K
	<b>System Lumen</b>	400lm	412lm	424lm
	<b>LED Efficacy</b>	54lm/W		
	<b>LOR</b>	>90%		
	<b>Driver</b>	Dimmable 230V LED*		
	<b>Dimmable with</b>	Leading/Trailing edge dimmer		
<b>Lens</b>	15° 30° included			



\* Due to the 230V frequency of 50Hz, some people may experience discomfort caused by the strobe effect of the light.

Article No.	Description
2.01.1015	Lens 15° for Galex Mini Two

Galex Mini Two 3000K (per spot head)

H (m)	Beam (lux)	Beam (Ø cm)	Field (Ø cm)
1	1372	58	89
2	343	116	179
3	152	174	268
4	86	232	358
5	55	290	447

Beam (50%) Angle: 32° Field (10%) Angle: 48°

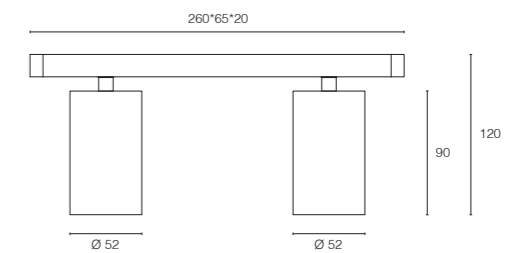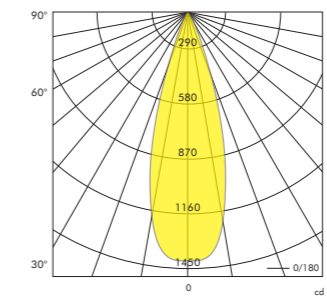

Article No.	Product Name	Color	System Lumen	CCT	CRI	Cooling	Power	Lens
2.17.2048	Surface mounted LED spot Galex Mini versatile 2-light	White	2* 400lm	2700K	>90Ra	Passive	2* 7.6W	30°
2.17.2049	Surface mounted LED spot Galex Mini versatile 2-light	White	2* 412lm	3000K	>90Ra	Passive	2* 7.6W	30°
2.17.2051	Surface mounted LED spot Galex Mini versatile 2-light	Black	2* 400lm	2700K	>90Ra	Passive	2* 7.6W	30°
2.17.2052	Surface mounted LED spot Galex Mini versatile 2-light	Black	2* 412lm	3000K	>90Ra	Passive	2* 7.6W	30°

Article No.	Product Name	Color	System Lumen	CCT	CRI	Cooling	Power	Lens
2.17.2045*	Surface mounted LED spot Galex Mini versatile 2-light	Grey	2* 400lm	2700K	>90Ra	Passive	2* 7.6W	30°
2.17.2046*	Surface mounted LED spot Galex Mini versatile 2-light	Grey	2* 412lm	3000K	>90Ra	Passive	2* 7.6W	30°
2.17.2047*	Surface mounted LED spot Galex Mini versatile 2-light	Grey	2* 424lm	4000K	>90Ra	Passive	2* 7.6W	30°
2.17.2050*	Surface mounted LED spot Galex Mini versatile 2-light	White	2* 424lm	4000K	>90Ra	Passive	2* 7.6W	30°
2.17.2053*	Surface mounted LED spot Galex Mini versatile 2-light	Black	2* 424lm	4000K	>90Ra	Passive	2* 7.6W	30°

\* Minimum order quantity: 50 units